

# SPECIFICATION SHEET

## POLO VERTICAL HEATED RAIL




### Features

- Dimensions: H1100 X D100
- Multi-connect wiring
- Available in Chrome (40W), Brushed Nickel (40W), Matte White (47W), Brushed Brass (40W), Gunmetal (40W), Brushed Copper (40W) & Matte Black (47W).
- 20-70 Watts Transformer is required per Polo Rail. Two or more Polo Rails cannot be wired into one transformer. Transformer must be placed within 2 meters of Polo Vertical Rail
- Transformer options: LT050 (20-70 Watts)

### INSTALLATION INFORMATION


In wall pre-wiring and solid timber internal wall fixing is required prior to installation. Recommended for mounting on hard surfaces, such as tile walls. For installation instructions visit [newtech.co.nz](http://newtech.co.nz)

### Colour Options with Code

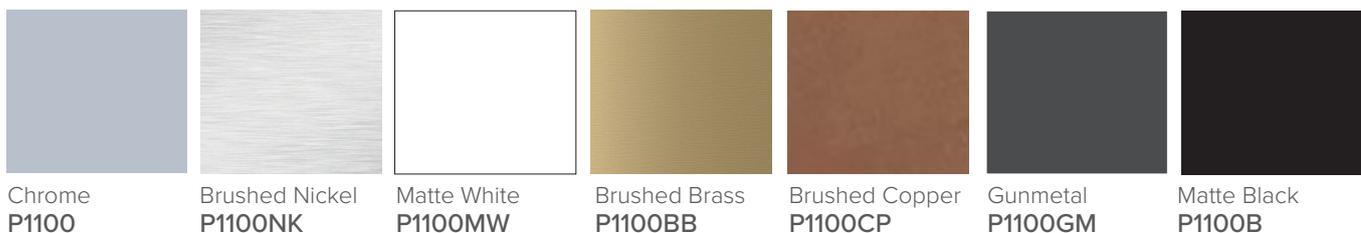

### Technical Details

Note: All measurements shown are in millimetres. Sizes are nominal.

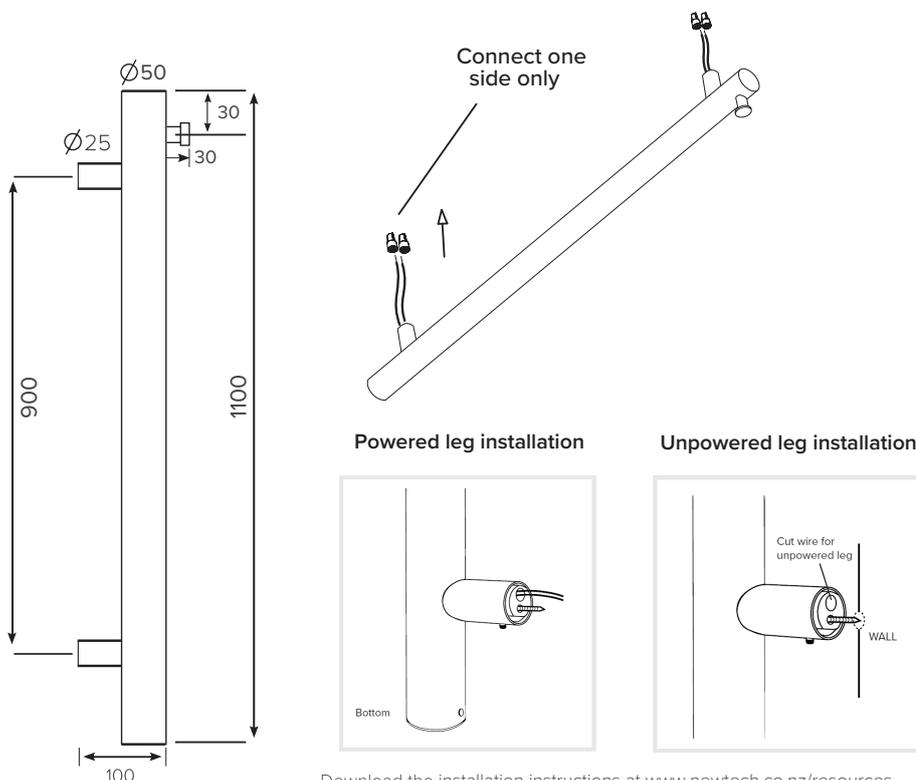

Download the installation instructions at [www.newtech.co.nz/resources](http://www.newtech.co.nz/resources)



Designed for NZ bathrooms and tested to ensure they meet the high product standards set by Australia & NZ Standards AS/NZS 60335.



10 Year Warranty offers our customers peace of mind knowing our products are free of defects, both in materials and workmanship.



5 Year Warranty on Brushed Brass, Brushed Copper, Matte Black, Matte White & Gunmetal Colour Finishes.



Rated 12V for use in Zone 1. This allows you to position your towel rail almost anywhere in your bathroom.



Must be installed by a Registered Electrician to comply with AS/NZS 60335 Safety Standards.



Can be used in conjunction with a timer.



Manufactured from high quality durable Stainless Steel