



## Class 1

Building Product Information Requirement

Product Name:

2cm Sandstone Charcoal Paver 600 X 600

Product Identifier:

2CMSANDSTONEC


Product Description & Specifications:

The Sandstone range combines the beauty of sandstone, with the durability of glazed porcelain. The stone has been reproduced in its natural colours, preserving the design and surface to be able to bring it into our homes in all its purity. Available in 4 colours - white, ivory, grey and charcoal and a full selection of finishes and sizes, including 600x600 and 600x1200 matt for indoor areas, as well as 600x600 in both 10mm and 20mm thicknesses for outdoor use. It is the best choice to deliver a consistent indoor - outdoor flow for your house.

The 2cm thickness makes these tiles an excellent alternative to traditional hard landscaping materials. They can be dry laid onto grass, gravel or sand, and can also be installed with adhesives, or onto elevated deck jacks such as our Versijack Pedestals. Glazed porcelain with a non-slip surface that will never need sealing. These tiles will not stain or fade, they are resistant to breakage and easy to clean. Also available in matching 10mm interior and exterior tile.

<b>Finish:</b>	Antislip
<b>Material:</b>	PORCELAIN
<b>Origin:</b>	CHINA
<b>Size:</b>	600 x 600
<b>Thickness:</b>	20
<b>Antislip Rating:</b>	R11/V
<b>Variation:</b>	3
<b>Weight:</b>	42 kg per m <sup>2</sup>
<b>Rectified:</b>	Yes
<b>Sealing Required:</b>	No
<b>Colour:</b>	Charcoal
<b>m<sup>2</sup> Per Box:</b>	0.72
<b>Tiles Per Pack:</b>	2

Image:

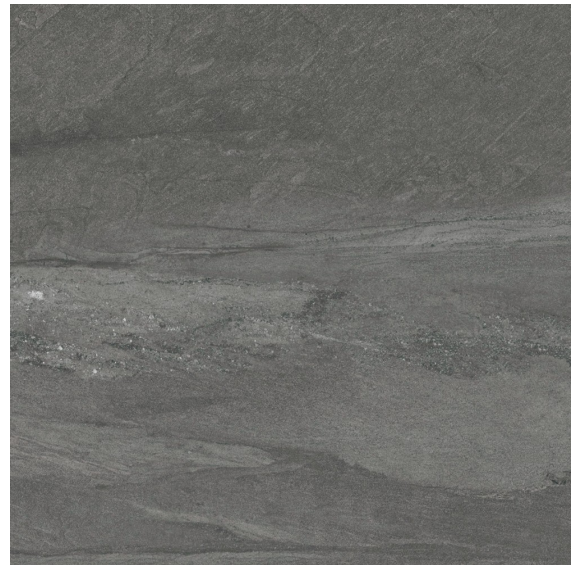

Manufacturer:

Tile Depot Approved supplier. All our manufacturers produce material to comply with the technical requirements and tolerances prescribed by ISO13006.

Legal and Trading name of the importer:

**Tile Depot LP**  
NZBN: 9429049866773  
Address: 83 Harris Rd, East Tamaki, Auckland, New Zealand  
Website: [www.tiledepot.co.nz](http://www.tiledepot.co.nz)  
Email: [info@tiledepot.co.nz](mailto:info@tiledepot.co.nz)



Phone: 0800 845 3337



## Relevant Building Code Clauses:

### **D1 – Access Routes** Refer Section 2.0

Requires access routes to have an adequate slip resistance surface. For housing this requirement applies only to the access route on the approach to the main entrance and not inside that entrance and not on the approach to other entrances. The internal access routes of housing, including kitchens and bathrooms shall be assumed to be dry in normal use. When specifying suitability of a selected tile refer to D1 2.0 in conjunction with the slip rating of the material provided.

### **E3 – Internal Moisture**

Clause 3.1.1 references product porosity. Ceramics are a commonly accepted industry solution and porcelain tiles have a very low water absorption level (less than 0.5%). Higher porosity ceramic and natural stone products can be presented as an alternative solution. Ceramic wall tiles have an impervious glaze and a protective layer called an engobe. Natural stone can be sealed with a penetrating sealer. Grouts can be sealed or the use of epoxy grouts will minimise water penetration to the substrate. If in doubt check with the specifier prior to installation.

### **C3 – Protection from Fire**

The Building code relating to fire rating regulations and standards requires specifiers to provide documentation such as fire certificates for materials used in construction. Ceramics are in itself fire-resistant material, most being manufacturer in excess of 1200 degree Celsius. Testing and providing such certification is therefore not relevant to the ceramics industry.

Ceramics are non-combustible and they do not release fumes or toxic gases in the event of a fire. Ceramics contain no sealants, waxes or other chemicals that could release VOC's into the environment. Ceramics do not pose a risk of spreading or intensifying a fire.



Statement on how this product is expected to contribute to compliance:

D1 – Access Routes – subject to intended use, location and slip resistance properties of selected tile.  
C3 – Protection from Fire - Ceramics do not pose a risk of spreading or intensifying a fire.

Limitations on the use of this building product:

Porcelain and ceramic tiles will not perform without a suitable substrate. It is the responsibility of the specification designer and / or installer to ensure an adequate substrate prior to installation.

Refer to the individual product specifications which outline characteristics including material, surface finish, size, PEI, weight and slip rating where applicable.

Installation Requirements:

Tiles must be installed by a competent trades person. Relevant resources include:

- MBIE Guide to tolerances
- Branz Good Practice guide – Tiling
- NCTC – Tile & Tiling Guide
- BCITO training and accreditation
- Installation systems from reliable adhesive & waterproofing manufacturers

Tiles are one of the most hygienic and easily maintained wall and floor surfaces available. A simple routine clean is required regularly with suitable tile specific cleaning agents.

This product is not subject to a warning or ban under section 26 of the Building Act 2004

Version 1

Date: September 23 2025