



# NEPTUNE ELITE WHITE WASHED OAK SPC 178 X 1235


## Description

Please ensure installation instructions are followed (printed on the back of each box). Any breach of instructions may cause performance issues and will void the product warranty.

- EXPANSION: minimum 6mm perimeter gap is required. Areas that are exposed to direct sunlight and temperatures over 40°C or subject to significant temperature fluctuations, the expansion joint should be increased to at least 10mm.
- FLOOR PREP: less than 5mm over 3m.
- SKIRTINGS must not be siliconed as this will restrict movement causing possible failure. For wet areas such as Kitchens, Laundries and WC's follow Alternative Solution installation methods available here - <https://cdn.neptune-flooring.com/wp-content/uploads/sites/2/2023/12/Neptune-E3-Alternative-Solution-Statement111-1.pdf>
- BATHROOMS: Whilst Neptune SPC is a completely waterproof product and globally used in wet areas, The Tile Depot advise against using in permanently wet areas such as bathrooms due to the risks associated with moisture and flooding.
- MOISTURE BARRIER: We strongly recommend the use of a vapor barrier regardless of the substrate, subfloor moisture can lead to installation failure, alkali salt build up damage to joints and a potential mould source.

PLEASE READ: Floor to ceiling windows coupled with the New Zealand sun can create floor surface temperatures over 70°C. Neptune flooring is manufactured to be stable in low and high temperatures (0-50°C). However, your floor should be protected from extreme temperatures and strong direct sunlight by the use of interior temperature and humidity control (recommended temperatures 10 - 30°C), window tinting, awnings and/or curtains/ blinds. Dramatic temperature changes and/or extreme humidity can cause joints to lip/gap and prolonged direct sunlight may cause fading.

For more information, data sheets and installation guides <https://www.tiledepot.co.nz/neptune>

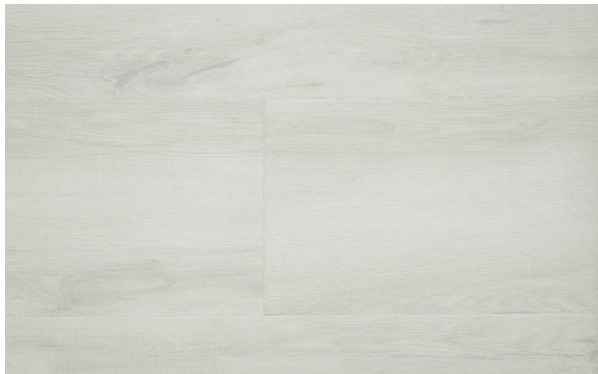



**\$69.90** per m2  
(incl GST)

**Stock**  
Very High (200+ m2)

## Specifications

|                         |                           |
|-------------------------|---------------------------|
| Finish:                 | MATT                      |
| Material:               | SPC                       |
| Origin:                 | CHINA                     |
| Size:                   | 178 x 1235                |
| Antislip Rating:        | R10                       |
| Variation:              | 3                         |
| Weight:                 | 8.4 kg per m <sup>2</sup> |
| m <sup>2</sup> Per Box: | 2.19                      |
| Tiles Per Pack:         | 10                        |

