




ARNO
IVORY

PRIMI
CERAMICHE

SIZE

60x60 24"x24"
30x60 12"x24"
80x80 32"x32"
40x80 16"x32"

DIGITAL TECHNOLOGY



VARIAZIONE DI TONALITA'
SHADE VARIATION
VARIACION DE TONO

V2 lieve variazione – light variation – ligera variación

GLAZED CERAMIC
CERAMICA ESMALTADA
matt-antislip-semipolished


PEI 4

GLAZED PORCELAIN
PORCELANATO ESMALTADO
polished

PEI 4



ARNO ivory

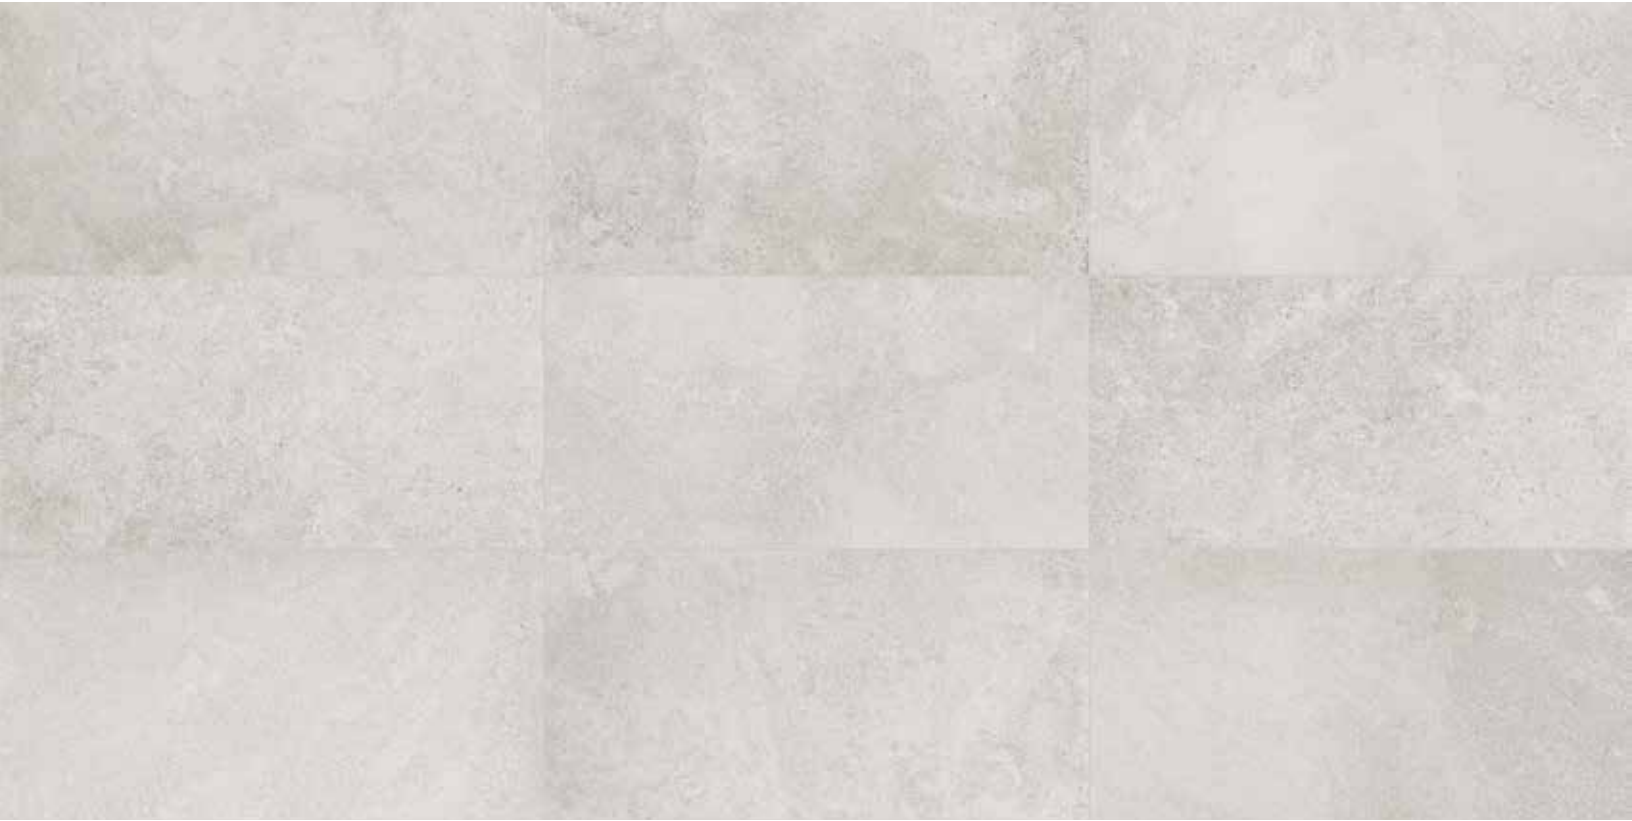

ARNO pearl



ARNO beige



ARNO grey

Tech sheet



Packages

	Pcs. x 	m2. x 	kg x 	 x 	m2 x 	kg x 
80x80	2	1,28	33	36	46,08	1188
40x80	4	1,28	32	40	51,20	1280
30x60	8	1,44	33	40	57,60	1320
60x60	4	1,44	33	40	57,60	1320

Physical properties

Norms	Glazed Porcelain Tiles	average value
UNI EN ISO 10545 - 3	Water Absorption	<0,5%
UNI EN ISO 10545 - 4	Bending strength	>-35N /mm"
UNI EN ISO 10545 -12	Frost resistance index	Frost proof
UNI EN ISO 10545 - 9	Resistance to thermal shock	Resistant
UNI EN ISO 10545 - 2	Thickness	± 1%
UNI EN ISO 10545 - 2	Surface Flatness	± 0,2%
UNI EN ISO 10545 - 13	Chemical resistance	No Damage
UNI EN ISO 10545 - 14	Stain resistance	>4
ANSI A 137.1 : 2012	Dinamic coefficient of friction "DCOF"	0,43

