

**AREZZO**


**GREY**

**PRIMI**  
CERAMICHE

# SIZE

30x60 12"x24"  
60x60 24"x24"  
40x80 16"x32"  
80x80 32"x32"

# DIGITAL TECHNOLOGY



VARIAZIONE DI TONALITA'  
SHADE VARIATION  
VARIACION DE TONO

V2 lieve variazione - light variation - ligera variación

GLAZED CERAMIC  
CERAMICA ESMALTADA  
matt

PEI 4




**AREZZO** pearl



**AREZZO** grey



**AREZZO** pearl

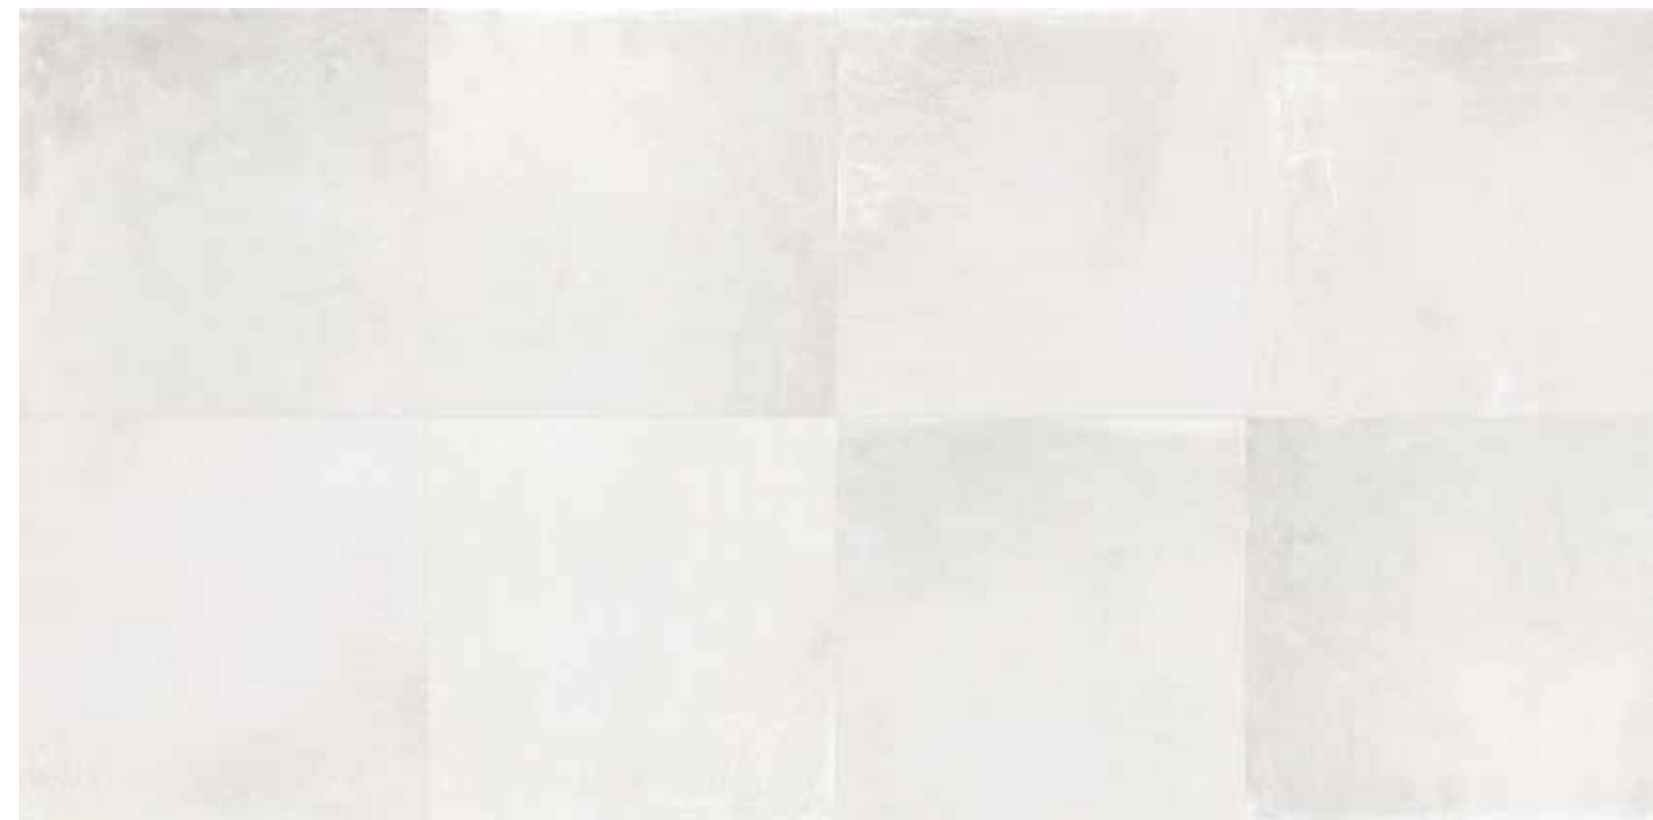








**AREZZO** ice

# Tech sheet



## Packages

	Pcs. x 	m2. x 	kg x 	 x 	m2 x 	kg x 
80x80	3	1,92	48	28	53,76	1344
40x80	4	1,28	32	40	51,20	1280
60x60	4	1,44	31	40	57,60	1240
30x60	8	1,44	31	40	57,60	1240

## Physical properties

Norms	Glazed Porcelain Tiles	values natural
UNI EN ISO 10545 - 3	Water Absorption	±1%
UNI EN ISO 10545 - 4	Bending strength	>-35N /mm"
UNI EN ISO 10545 -12	Frost resistance index	Frost proof
UNI EN ISO 10545 - 9	Resistance to thermal shock	Resistant
UNI EN ISO 10545 - 2	Thickness	± 1%
UNI EN ISO 10545 - 2	Surface Flatness	± 0,2%
UNI EN ISO 10545 - 13	Chemical resistance	No Damage
UNI EN ISO 10545 - 14	Stain resistance	>4
ANSI A 137.1 : 2012	Dinamic coefficient of friction "DCOF"	0,43

